


# DHL550UDM-ES

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 1.7mm)

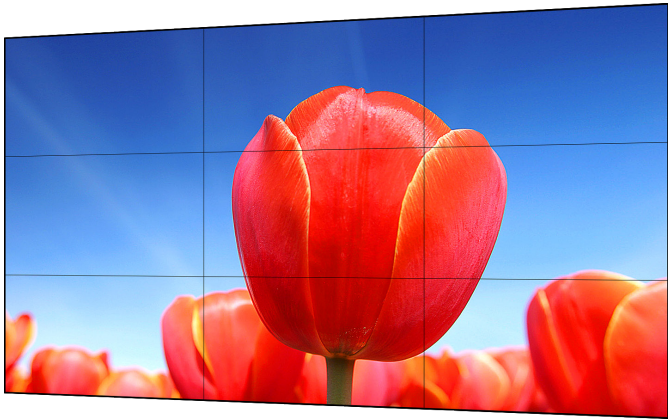

## Technical Specification

### Model

Model	DHL550UDM-ES
-------	--------------

### Display

Diagonal	55"(16:9)
LCD Technology	PVA
Resolution	1920×1080 (FHD)
Bezel width	1.15mm(U/L), 0.55mm(R/B)
Backlight	Direct LED
Brightness/Luminance	500 cd/m <sup>2</sup>
Contrast Ratio	4000:1
Pixel Density	40dpi
Viewing Angle	H178°, V178°
Response time	8ms
Display Color	8bit(16.7M)
Color Temperature	10,000K
MTBF	50,000h

### Signals

Input	CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1, IR×1
Output	CVBS(BNC)×2, RS232×1

## Features:

- Industrial level PVA LCD panel, suitable for extensive 24/7 continuous works
- Ultra-narrow 1.7mm bezel-to bezel design(1.15mm bezel on the left and top sides and 0.55mm bezel on the right and bottom sides)
- High contrast ratio and high brightness greatly enhance the video layering, and present the details of the video
- High fidelity digital processing for a brilliant and vivid video
- Built-in 3D COMB filter and 3D noise reduction
- Wide array of connectivity options HDMI, DVI, VGA, BNC, RS232, USB
- Infrared, RS232 dual mode, supporting remote PC control
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Fast stack installation, professional project design, supporting arc-shaped mounting
- Widely used in surveillance center, dispatching platform, safe city, commercial display, etc.



## General

Consumption (Standard)	150W	
Consumption (Standby)	≤0.5W	
Power Supply	AC100V ~ AC240V, 50/60 Hz	
Installation Mode	Floor-standing/ Wall-mounted	
Control Mode	Infrared, RS232 dual mode, supporting remote PC control	
Net Weight	37kg(81.4lb)	
Gross Weight	30kg(66lb)	
Dimension (W×H×D)	1211.5mm×682.3mm×118.3mm(47.7"×26.9"×4.7")	
Package (W×H×D)	1324mm×936mm×244mm(52.1"×36.9"×9.6")	
Work Environment	Temperature	0 C~+50 C
	Humidity	20%RH~90%RH

Dimensions(mm)

