


EC-C2-21123D-BK-3

RG-11 (75 Ω),
 CCS, PE -40C,
 305

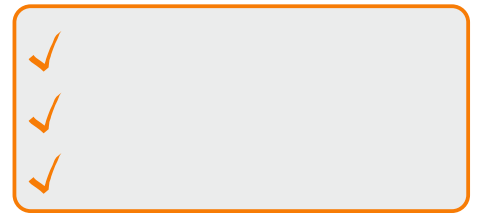


RG-11 EC-C2-21123B-BK-3

1,63

75

305

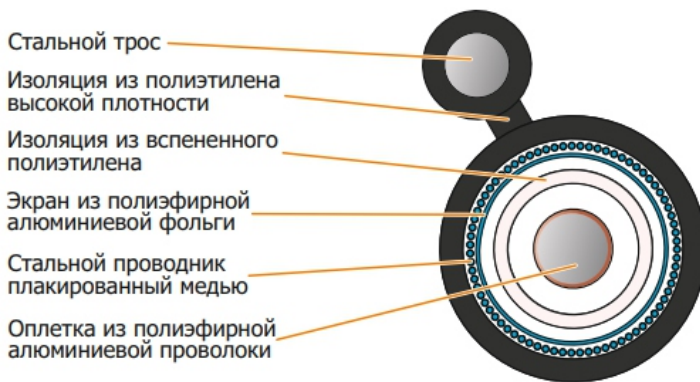

NETLAN EC-C2-21123D-BK-3 COAXIAL CABLE RG-11 75
 1.63MM CCS + AL/PET/AL FOIL + AL BRAID SHIELD + 10.16MM
 PE OUTDOOR -40C WITH SOLID STEEL MESSENGER



305

	EC-C2-21123D-BK-3
	75
	1,63 ± 0,02
	(17%)
	7,11 ± 0,2
1-	100%
2-	(96x0,12±0,01), 47%
	(PE)
	1,0 ± 0,01
	10,16 ± 0,03
	1,83
	82,5 ± 0,5
	15-
	12-
	5000
	75
	50
	305
	-40 +60. -10 +50. -40 +60
	-
	1

	/100
250	8,62
300	9,38
450	10,43
600	11,55
865	15,2
1000	16,5

EC-C2-21123D-BK-3	RG-11	, PE		305	0,070560	29,000