

4

3

2

1

REVISIONS			
ZONE	REV	DESCRIPTION	DRAWN

JACK HOUSING

INSERT MODULE

IDC MODULE

WIRE CAP

CLIP

TRANSMISSION PERFORMANCE

Meet TIA/EIA-568-C.2 Cat.6 Connecting Hardware requirements.

ELECTRICAL

Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute, 1500V d.c. or a.c. Peak Contact to Panel @ 60Hz for 1 minute

MECHANICAL



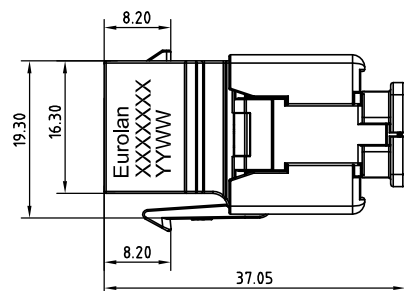

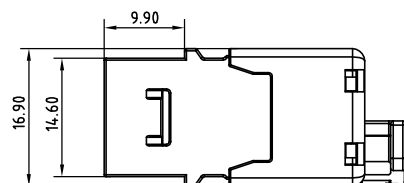
Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL

Housing : Zinc-alloy fully shielded
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

COMPONENTS

ITEM	PART NAME	Q'TY
1	JACK HOUSING	1
2	INSERT MODULE	1
3	IDC MODULE	1
4	WIRE CAP	1
5	CLIP	1

**PACKAGING:**

1pc / Eurolan PE bag

25pcs / Eurolan inner box

600pcs / Eurolan carton

Eurolan carton size: 515x505x230(mm)

UNLESS OTHERWISE SPECIFIED: TOLERANCES		PROJECT ID 16B-F6-07SL		EUROLAN	
INCH	MM	FILE	DATE	TITLE	
.X ± .016	.X ± 0.2			KEYSTONE JACK	
.XX ± .008	.XX ± 0.1			SIZE	DRAWING NUMBER
.XXX ± .004	.X ± .5			PART NUMBER	REV
MATERIAL		DRAWN		SCALE	1 : 1
SURFACE		CHECK		UNIT	mm
FINISH		APPROVED		SHEET	