
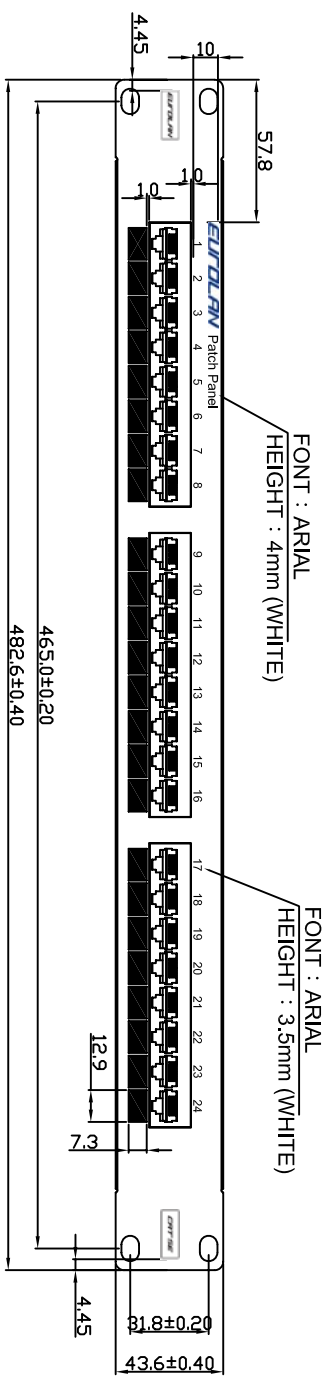


REVISIONS		1
ZONE / REV	DESCRIPTION	DATE

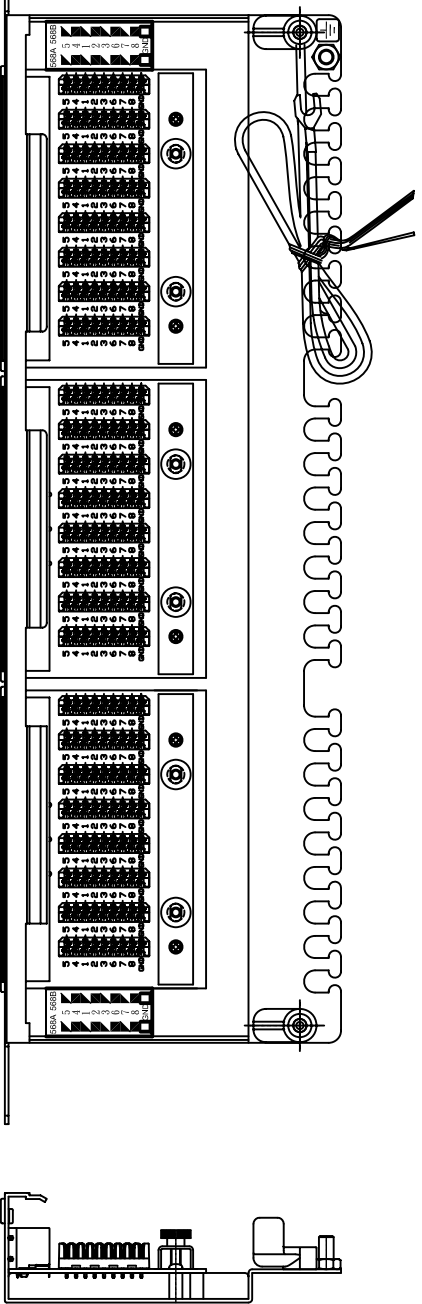

Transmission Performance:
 Attenuation: Meet all requirements specified in connecting hardware requirement of TIA/EIA-568-B.2 Cat.5e
 Return Loss: Meet all requirements specified in TIA/EIA-568-B.2-1 Cat.6.
 NEXT: 5 Meter short link passed.

ENVIRONMENTAL CONDITIONS

Temperature Range -40 to +70°C
 Storage -10 to +60°C
 Relative Humidity (Operational) : Maximum Noncondensing 95%

ELECTRICAL

Electrical Insulation Resistance : 500 MΩ
 min. @ 100V d.c.
 Dielectric Withstanding Voltage : 1000V RMS @ 60Hz for 1 minute
 Contact Resistance : 20 MΩ Max.
 Current Rating : as figure.

MECHANICAL

Total Contact Force : 800 GRAMS for A 8 Wire Leads Minimum
 Retention : 50N (11 lbf) for 60s±5s
 Insertion / Extraction Life : 750 Cycles Minimum
 IDC Wire Gauge : 22 ~ 26 AWG

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V0
 Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold Over 100 micro-inch of Nickel
 IDC : Phosphor Bronze Alloy With 100 micro-inch 9-1 Sn-Pb Alloy
 CASE&COVER: Galvanized steel

PACKAGING:

1 PC packed by bubble bag / Eurotan box
 Eurotan box size : 76X146X506 mm
 10 pcs Eurotan box / Eurotan carton
 Eurotan carton size : 515X394X318 mm



TELE PATCH PANEL 24P

UNLESS OTHERWISE SPECIFIED:		PROJECT ID	
INCH	TOLERANCES	27B-F5-24BL	
.XX ± .016	MM	FILE	DATE
.XXX ± .008	ANGULAR	Winnie	
.XXX ± .004	X ± .1°	DRAWN	CHECK
	X ± .5°	APPROVED	
SURFACE			
FINISH			
SIZE	DRAWING NUMBER	PART NUMBER	REV
A4			
SCALE	UNIT	SHEET	1 OF 1
	MM		